

The Social Costs of Intercity Passenger Transportation: A Review and Comparison of Air and Highway

by David M. Levinson,

David Gillen,

Adib Kanafani

University of California at Berkeley,

Institute of Transportation Studies

McLaughlin Hall, Room 109

Berkeley, CA 94720

November 3, 1997 revision

1. INTRODUCTION

There has been a great deal of interest in the issue of the social or external costs of transportation (Keeler et al. 1974, Fuller et al. 1983, Quinet 1990, Mackenzie et al. 1992, INRETS 1993, Miller and Moffet 1993, Works 1993, IWW/INFRAS 1995, IBI 1995, Litman 1995, Delucchi 1996). The passions surrounding social costs and transportation, in particular those related to the environment, have evoked far more shadow than light. At the center of this debate is the question of whether various modes of transportation are implicitly subsidized because they generate unpriced externalities, and to what extent this biases investment and usage decisions. On the one hand, claims of environmental damages as well as environmental standards formulated without consideration of costs and benefits often result in slowing or stopping investment in new infrastructure. On the other hand, the real social costs are typically not recovered when financing projects and are rarely used in charging for their use.

This paper, developed for a study on the full costs of intercity transportation comparing air, highway, and high speed rail in the California Corridor between San Francisco and Los Angeles (Levinson et al. 1996), provides a survey of the literature on the measures of social costs for intercity passenger transportation, providing an indication of the state of engineering and economic literature. While intercity transportation in this corridor is largely exurban or rural, the same methods can be applied to travel in urban and dense suburban areas. We operationalize the new thinking about what externalities are appropriate to consider in an analysis of the transportation system for developing the full cost without double counting or attributing to transportation costs which are really due to other economic sectors. We measure each significant externality: noise, air pollution, accidents, and congestion for both highway and air transportation, as a function of output or use where possible, rather than as simple unit or average costs. We compare air and highway on as equal a basis as possible by retaining methodological consistency.

Before we can measure externalities, we must define them. Spulber (1989) states that “[a]n externality refers to a commodity bundle that is supplied by an economic agent to another economic agent in the absence of any related economic transaction between the

two agents.” Rothengatter (1994), cites the definition: “an externality is a relevant cost or benefit that individuals fail to consider when making rational decisions.” These definitions bring out the idea that in addition to there being willing parties to transactions, there are also unwilling parties, parties subject to the externality. In our analysis we are dealing with negative externalities, that is a commodity bundle or a cost which the receiving party would rather not receive without compensation.

Central to the definition and valuation of externalities is the definition of the agent in question. One way is to define agents as comprising each vehicle, which influences other vehicles (agents) by generating effects (such as congestion and increasing the risk of accident) largely contained within the transportation system, and which also influences unrelated agents by generating effects (such as noise and air pollution) not contained within the transportation system. Alternatively, the infrastructure operator may be selected as the agent, thereby internalizing the first set of effects. However we choose the first definition giving us a broader scope of externalities to examine.

Second, we must determine what “commodity bundles” or externalities are appropriate to consider in this context. This depends on how we define the problem of intercity transportation. Overall, the intercity transportation system is open, dynamic, and constantly changing. Some of the more permanent elements include airports, intercity highways, and railroad tracks. The system also includes the vehicles using those tracks (roads, rails, or airways) at any given time. Other components are less clear cut - are the roads which access the airports, freeways, or train stations part of the system? The energy to propel vehicles is part of the system, but is the extraction of resources from the ground (e.g. oil wells) part of the system? Delucchi (1991) analyzes them as part of his life-cycle analysis, but should we? Where in the energy production cycle does it enter the transportation system?

Any open system influences the world in many ways. Some influences are direct, some are indirect. The transportation system is no exception. Three examples may illustrate the point:

- a) First Order (Direct) Effect: A road improvement reduces travel time and increases peak traffic flow.
- b) Second Order (Less Direct) Effect. Reduced travel time increases the amount of land development along a corridor. This is not direct because other factors may intervene to cause or prevent this consequence.
- c) Third+ Order (Indirect) Effect: The new land development along a corridor results in increased demand for public schools and libraries.

As can be seen almost immediately, there is no end to the number or extent of third+ order (indirect) effects, which may follow in turn from second order (less direct) effects. While recognizing that the economy is dynamic and interlinked in an enormous number of ways, we also recognize that it is almost impossible to quantify anything other than proximate, first order, direct effects of the transportation system. Rather than building a structural model of the economy tracing the reverberations and interactions of all choices, decisions and outcomes, we rather rely on correlation between cause and effect, given that many effects have multiple causes which only influence the outcome probabilistically. If the degree to which “cause” (transportation) and “effect” (negative externality) are correlated is sufficiently high, then we consider the effect direct; the lower the probability of effect following from the single (transportation) cause, the less direct is the effect. The question of degree of correlation is fundamentally empirical, and the appropriate level of correlation to use contains an element of arbitrariness.

Several costs are excluded because they are outside the strictly defined intercity transport sector. In order to evaluate costs, borders must be drawn around the system we are considering, otherwise one is drawn into a full evaluation of the entire economy. First, we exclude pecuniary externalities, the effect on other markets due to changes in price associated with changes in demand. For a limited project, for instance a single corridor, it is unlikely prices in most commodity markets will change noticeably. Some researchers ascribe a fraction of U.S. defense costs to the transportation sector, since much of that defense is of the Middle East, an oil producing region, which would not otherwise be defended. The links are tenuous, and certainly outside the market. It is

unclear whether such defense expenditures actually lower energy costs and they may be undertaken for a variety of geopolitical reasons. Others consider parking to be a cost associated with transportation. Parking is not “free”, it is either charged directly to the consumer or subsidized by the provider (a shopping center or office building or the community which builds wider than necessary streets). Parking costs are not included since this research evaluates the differences in intercity transportation, and parking is a local cost which is unlikely to be avoided by switching intercity travel modes. Access costs, the costs to access the intercity transportation system (the airport, the interstate highway) are not considered as they are mainly local and would largely complicate the work, in addition to not being significantly different for the two modes. “Sprawl” and increased costs of serving dispersed land uses are sometimes blamed on the automobile. Certainly automobility enables dispersed housing, but so does the telephone and any number of other technologies. It is at least a second order effect, and outside the intercity transport sector. There are also costs which have long been recognized but are seemingly impossible to accurately quantify, including things like “social severance” or the cost of dividing communities with infrastructure, or “ecosystem severance”, the cost to the environment of driving a highway through local ecologies.

In this analysis, we divide the direct external costs (inputs) into four main categories: Noise (Quiet), Air Pollution (Clean Air), Accidents (Safety), and Congestion (Time), which are discussed sequentially in the following sections. Each section in turn describes the measurement of that externality, how much is generated as a function of transportation output, how that externality is valued, and an integration of these two elements to arrive at the total cost of that externality. Further, the sections on generation and integration are separated into subsections on highway and air, while questions of measurement and valuation are treated consistently between the modes. After reviewing the full cost of each externality, we compare them across modes. The paper concludes by noting that the value of externality varies with modal use, and despite all of the research we still lack a knowledge on the true economic costs of externalities. The challenge is not simply measuring the externality, but also valuing it; a bridging of the fields of engineering and economics.

2. NOISE

2.1 Measurement

Noise is usually defined as unwanted sound. Sound is most commonly measured by the decibel (dB), which is defined as follows (Starkie and Johnson 1975):

$$(2-1) \quad \text{dB} = 10 \log_{10} (P^2/P_{\text{ref}})$$

where: P = pressure in Newtons/m²

$P_{\text{ref}} = 0.00002$ Newtons/ m², which is the quietest audible sound.

The frequency of sound is measured in cycles per second (Hertz), the range from 20 - 16,000 Hertz can be heard by the human ear. Generally, sound measures are weighted to reflect what is perceived as “loudness.” The most common weight, the A scale, gives the measure dB(A), where the number of decibels is weighted by sound at various frequencies to give equivalent loudness.

When performing noise-cost studies, sound, which varies over the course of time, must be averaged to give an effective perceived noise level, which is the continuous energy mean equivalent of the noise level measured in dB(A) over a specific period. This is further translated into an index such as the Noise Exposure Forecast (NEF), which is defined as follows for highways.

$$(2-2) \quad \text{NEF} = L_{\text{epn}} + 10 \log_{10} N - 88$$

where: L_{epn} = Effective perceived noise level (loudness) measured in dB(A)

N = number of events (e.g. vehicles per hour, or number of flights per daytime, nighttime)

Measures for air travel are similar though the number of events is stratified between daytime and nighttime flights and weighted accordingly (nighttime flights are 16.67 times more onerous than daytime flights). It is important to note that due to the logarithmic scale of noise measurement the amount of noise measured is not linearly

additive with the number of vehicles. For instance, one (noisy) vehicle may generate 80 dB(A) noise, but two will only generate 83 dB(A).

2.2 Generation

2.2.1 Highway

Next we need to measure the amount of noise generated by a vehicle interacting with its infrastructure. Factors which influence this include background flow, the size of the vehicles, their speed, and materials of the pavement surface. In addition, the propagation of the noise over distance is influenced by ground cover, obstruction, barriers, the grade of the road or slope of take-off, the grade of surrounding land, and presence of buildings. Complex models and analyses using site specific data can more precisely account for variations due to those effects. For this exercise, it will be assumed that propagation is simple, over an unobstructed plain, since we are attempting to obtain a general result for comparison purposes, not to site or mitigate a specific facility.

For highways, rather than measure the noise associated with each car, the noise is generally associated with the overall flow. The basic noise level measured is L_{10} , the amount of noise exceeded 10% of the time (UK DOT 1988). The 1 hour basic noise level is given by equation (2-3), and the additive corrections both for mean traffic speed and heavy vehicles (C_{pv}) and for the adjustment for distance from the edge of the roadway (C_d) are given in equations (2-4) and (2-5) respectively:

$$(2-3) L_{10} = 42.2 + 10 \log_{10} Q_h \text{ dB(A)}$$

$$(2-4) C_{pv} = 33 \log_{10} (V + 40 + 500/V) + 10 \log_{10} (1 + 5 p_{hv}/V) - 68.8 \text{ dB(A)}$$

$$(2-5) C_d = -10 \log_{10} (d/13.5) \text{ dB(A)}$$

where: V = mean traffic speed in km/hr

p_{hv} = percentage of heavy vehicles

Q_h = hourly traffic flow

d = shortest slant distance from the effective source (meters)

2.2.2 Air

Noise due to aircraft can be associated with airports and with aircraft flying overhead not in the process of takeoff or landing. Most research in this domain has dealt with noise around airports. While it is the aircraft that actually generate the noise, it is the airport, the most convenient point of complaint, that is held responsible. The annoyance caused by aircraft noise is due to a number of unique factors, including individual preferences, socio-economics, environmental conditions, local topography, specific flight paths, and number of flights. Aircraft noise production is tied to the “stage” of the aircraft, its level of technology, which is related to its age and size. The technology determines total engine thrust needed, and is thus an influence in noise production.

2.3 Valuation

The damages caused by noise include the loss of sleep, lower productivity, discomfort and annoyance. These are hard to quantify, but because they are associated with a place, the amount of damage is often viewed as resulting in lower property values. This provides a basis for establishing a value for noise (quiet). A number of studies have been performed over the years to measure the decline in residential property value due to noise and its associated vibration. This has not been done for non-residential (commercial and public) buildings, however, where abatement measures are more cost-effective. Tables 1 and 2 summarize empirical findings of noise damage by roads and airports from hedonic models of housing collected by Nelson (1982a,b), Modra and Bennett (1985), and others. These studies use a noise depreciation index (NDI), the percentage reduction of house price per dB(A) above ambient noise.

The average NDI for all of the airport noise surveys since 1967 (excluding the first three) is 0.62, the same value as for highways. While any given study may have its flaws, unless there is a systematic bias in these hedonic studies as a group, averaging a large

number of studies together should provide a reasonable, first-order, approximation of the actual value, as well as a recognition of the large range in values for any given site.

2.4 Integration

2.4.1 Highway

In order to translate noise production rates into economic damage costs we must estimate total residential property damage costs per linear kilometer of a roadway or around airports. A model was developed and run through a number of scenarios to develop simplified average (and marginal) cost functions by applying the equations in the earlier subsections. Application of the noise model under certain assumptions, gives us an average cost curve for the noise damage associated with each passenger kilometer traveled depending on the number of vehicles per hour (Q_h).

The model is solved by dividing the area on each side of the roadway into 10 meter strips (s) parallel to the road. Each 10 meter by one kilometer strip has a number of housing units (H_s) depending on the density. The total damage for each strip is computed based on multiplying the homes by the value (HV) of each home by the noise depreciation index (NDI) by the net increase in the NEF (after (NEF_a) - before (NEF_b)). The total damage as a present cost (PV) is summed over all the ten meter strips for a one kilometer stretch.

$$(2-6) \quad PV = \sum_s (H_s)(HV)(NDI)(NEF_a - NEF_b)$$

Because of the logarithmic shape of the noise curves, the higher the level of background noise, the smaller the percentage increase in noise production, but individual sensitivity to noise rises non-linearly with increases in noise. The costs are linear with respect to density, home value, noise depreciation index, and the number of passengers (as determined by capacity and load factor). It is non-linear with respect to speed and number of vehicles per hour.

Because there a number of complex assumptions in the noise model, and we are interested in a typical case with a range of flows, the model was estimated in reduced

form when we assume a speed of 100 km/hr and 10% heavy vehicles, a discount rate of 7.5% to calculate the present value of the reduction in the price of a home due to a long term noise phenomenon (a new highway), a noise depreciation index of 0.62, an average home value of \$250,000 and a typical suburban density of 360 houses per square kilometer. For automobile travel the integrated highway noise model gives a range of between \$0.0000/vkt and \$0.0060/vkt average cost, depending on flow.

A graph of the average cost of highway noise (AC_{hn}) (in \$/vkt) vs. flow is shown on figure 1, and the equation is given in (2-7) ($r^2 = 0.92$). However this value is extremely sensitive to assumptions. At an auto occupancy of 1.5 and flow of 6,000 vehicles per hour, this converts to \$0.0045/pkt.

$$(2-7) \quad AC_{hn} = [-0.018 + 0.0028 \ln(Q_h)] f_d * f_H * f_c$$

where: AC_{hn} = average cost of highway noise

$$f_d = \text{Density}/360 \text{ (default = 1)}$$

$$f_H = \text{House Value}/\$250,000 \text{ (default = 1)}$$

$$f_c = \text{Cost per dB(A)}/0.0062 \text{ (default = 1)}$$

To compare, INFRAS/IWW (1995) gives noise estimates from Europe of \$0.0058/pkt for automobiles, about the same for buses (\$0.0054/pkt) and \$0.0163/tkt (tonne km traveled) by truck. For cars, Miller and Moffet (1993) report a range from \$0.0008/pkt to \$0.0013/pkt, in 1990 U.S. dollars. For buses, they take \$0.0003/pkt as an acceptable value.

2.4.2 Air

Table 3 shows the estimated noise costs per passenger kilometer traveled generated by air travel in eight countries. The average value for these results is \$0.0043/pkt which is used here. For two reasons those numbers should be expected to be higher in Europe than in the United States. First noise standards are not as strict on aircraft engines, and second population densities (and thus impacted populations) are higher.

An alternative approach would require conducting economic engineering studies around the specific airports. In principle the methodology would be similar to that used for highway. However specific details about the noise generation of aircraft using each airport, flight paths, airline schedules, land uses, and topography would be required. This would provide the effective perceived noise level and noise exposure forecast for specific geographical zones. For each zone, a hedonic model could be applied to estimate the reduction in property value due to air traffic noise. This capitalized value would need to be allocated to specific aircraft, and then to passengers and passenger kilometers based on flight lengths.

A third approach would use the implied value of noise damage resulting from damages awarded by courts settling law suits. A given award would be taken to be damages, which again would need to be allocated to aircraft, passengers, and passenger kilometers.

3. AIR POLLUTION

3.1 Measurement

Probably the most difficult external cost to establish is that of air pollution. Determining the quantity of pollutants emitted from an automobile, airplane, or train is in principle a relatively straight-forward engineering task, though it depends on vehicle type, model year, vehicle deterioration, fuel type, speed, acceleration and deceleration, and other factors. However, traditionally, emission rates are determined by tests in laboratory, rather than actual conditions, so to some extent these rates underestimate the amount of actual emissions, particularly due to super-emitters, or poorly maintained vehicles (Small and Kazimi 1995). Determining the damage done is more difficult still, depending on the place and time of emission, density and distribution of the population, the climate, and topography. This section synthesizes earlier studies to develop cost estimates.

As used here, the types of air pollution fall into four main categories: Photo-chemical Smog, Acid Deposition, Ozone Depletion, and Global Warming; though it is

only the first and last for which significant research into transportation costs have been undertaken. However, there are several criteria pollutants which the EPA regulates, each of which is associated with health damages and are addressed in later subsections. There is considerable scientific controversy surrounding all of these categories, and there is no direct translation from pollutant emitted to damage inflicted. We describe the problems in some more detail:

- **Photo-chemical Smog** occurs low in the atmosphere and at ground level, and results in health, vegetation, and material damages. Seasonal in nature and peaking in the summertime in most areas, smog's principal cause is tailpipe emissions from automobiles. Ozone, formed in the atmosphere by a reaction between volatile organic compounds (VOCs), nitrogen oxides (NO_x) and water in the presence of sunlight, is the main cause of smog.
- **Acidic Deposition** (Acid Rain), most prevalent in eastern North America and Europe, is found in the troposphere. Acid rain is formed when sulfur dioxide (SO₂) and nitrogen dioxide (NO₂) react with H₂O to form sulfuric and nitric acid. The principal source of SO₂ is fixed source burning of fuels, particularly coal, such as in electricity generation.
- **Stratospheric Ozone Depletion** - Ozone (O₃) is formed when oxygen molecules (O₂) are combined with oxygen atoms photodissociated from other oxygen molecules. The layer of ozone in the atmosphere reflects ultraviolet radiation bombarding the earth. Due to manmade pollutants, particularly chloro-fluorocarbons (CFCs), the layer has become thinner over time. The Montreal Protocol required the phasing out of damaging CFCs, such as used as refrigerants for air conditioners.
- **Global Warming** (Greenhouse Effect) is a result of trace gases in the troposphere absorbing heat emitted by the earth and radiate some of it back, thus warming the global atmosphere. The Intergovernmental Panel on Climate Change concludes that manmade pollutants are increasing the amount of heat retained by the earth, with possible long term consequences including raising the average planetary temperature,

resulting in a slight melting of polar ice-caps and a consequent rise in the sea-level. The impacts on global weather patterns are not well understood, some areas may benefit, but others are sure to lose. There is considerable dispute in the scientific community on the magnitude of changes caused by man-made pollution. In particular, little is understood about feedbacks within the environmental system, for instance a rise in temperature may increase cloud cover, which will cause more sunlight to be reflected rather than reaching the earth, thereby mitigating the temperature rise. Other feedbacks may make the problem worse. The economic and ecological effects of such changes are unknowable with certainty, although attempts have been made at estimating these costs (Nordhaus 1994).

Air pollution emissions come primarily from the excess byproduct of burning of a fuel, though there are other sources, including evaporation and leakage of feedstocks and finished energy resources, and venting, leaking, and flaring of gas mixtures. There are a number of stages in the fuel-cycle (Delucchi, 1991). Though transportation changes will obviously influence all of the stages in the fuel cycle, we are making the assumption in this paper that aside from the “end use” transportation stage, all other stages are in functioning markets for which pollution externalities have already been captured. This is the problem of the “first best” and “second best”. The idea of the first best solution which we adopt suggests that we optimize the system under question as if everything else were optimal. The second best solution recognizes that other systems are also suboptimal. Clearly, other systems are suboptimal to some extent or another. However, if we make our system suboptimal in response, we lessen the pressure to change the other systems. In so doing we effectively condemn all other solutions to remaining second best.

3.2 Generation

3.2.1 Highway

Despite many simplifications, the science of emissions estimation remains an extremely complicated subject. Models such as the EMFAC series (California Air Resources Board 1991) and the MOBILE series (Environmental Protection Agency 1988)

have been developed which characterize emissions generation by a number of factors including fleet mix (size and age of vehicles), fuel usage, the environment (temperature) and travel characteristics. For instance, light duty trucks pollute about 20% more than autos, medium duty trucks (with catalytic converters) pollute about two times as much as autos on HC and NO_x and the same on CO. Rates for heavy duty trucks are also about two times auto pollution rates for HC and CO, and five times for NO_x. Furthermore, older cars pollute more than newer, a 1972 model year is about ten times more noxious than a 1992 car, though most improvements came from standards implemented between 1972 and 1982. It has been noted from studies of pollution in more realistic situations that the rates proposed above may err on the low side. Small and Kazimi (1995) after reviewing considerable technical research, developed corrected emission factors shown in the rightmost three columns Table 4, which we adopt. We caution that even these numbers may be lower than actual emissions (Harley 1996).

While these are clearly macroscopic estimates, the highway emissions calculated here are in the same range as those suggested by the adjusted EMFAC7F rates after considering both running and cold start emissions and age of the fleet. We can compare the microscopic and macroscopic estimates in Table 4: for CO 8.1 gm/pkt (micro) vs. 6.1 gm/pkt (macro); for HC (VOCs) 2.3 gm/pkt (micro) vs. 0.95 gm/pkt (macro), while NO_x are 0.79 gm/pkt (micro) vs. 1.1 gm/pkt (macro). The more precise (and from a damage estimate, the more expensive) microscopic estimates from the EMFAC7F models, as adjusted for underestimation by Small and Kazimi (1995) are used for the auto mode.

EMFAC and MOBILE models only provide data on criteria pollutants, that is pollutants for which standards have been set for health reasons. Greenhouse gases (principally carbon dioxide and methane) do not have such standards. The carbon data of Table 4 is extracted from emission factors developed by the Energy Information Agency (1994). To compare, Pickrell (1995) reports emissions rates which convert to approximately 62 gm/pkt, which is of the same order of magnitude as our macroscopic estimate of 46 gm/pkt. British researchers have produced estimates which can be compared for our purposes. Wootton and Poulton (1993) convert fuel liters of gasoline to CO₂ by multiplying by a factor of 23.51 accounting for fuel density and the molecular

weight of CO₂. Their estimates of CO₂ emissions in gm/km range from 162 to 228 depending on the size of the vehicle. Converting grams of CO₂ into grams of carbon (dividing by 3.6667) gives, at an occupancy of 1.2, of 42 gm/pkt, which is broadly consistent with our estimates.

3.2.2 Air

Overall, estimates of pollution from aircraft are significantly smaller than from cars. Combining the total emissions with an estimate of passenger kilometers traveled by jets in the United States produces an estimate of pollution per unit output shown in the left two columns Table 4. However this ignores some of the joint cost aspects of both air and highway travel, where freight is shipped along with passengers. This suggests that on a per passenger kilometer basis, aircraft are cleaner than automobiles by about a factor of 10.

3.3 Valuation

We divide the valuation of pollution damages into three components: health effects of local pollution, material and vegetation effects of local pollution, and global effects. Clearly the damages of the local pollution depends on where it occurs, pollution in Los Angeles is more costly than pollution in a rural area.

Some recent work on the costs of air pollution from cars comes from Small and Kazimi (1995) analyzing the Los Angeles region. They review recent evidence on mortality and morbidity and its association with pollutants (VOC, PM10, SO_x, NO_x) and they combine various exposure models of the Los Angeles region with health costs. Their findings, shown in Table 5, suggest that particulate matter (PM10) is a primary cause of mortality and morbidity costs, followed by morbidity due to ozone. Of course, costs in densely populated areas, such as the Los Angeles basin, should be higher than in rural areas as the exposure rate is far higher. They also assume a value of life of \$4.87 million in their baseline assumptions, though they test other scenarios, we report their estimate using a \$2.7 million value of life for consistent comparison with the accident data.

In Table 5, we also compare the Small and Kazimi results with health cost estimates from Fuller et al (1983) and Ottinger et al (1990) (updated to 1995 dollars). The estimates are most similar on the ozone producing NO_x and HC, and vary widest for the particulate problems due to PM₁₀ and SO_x.

Fuller et al. (1983) and Ottinger et al (1990) also estimate materials damage, again the numbers vary, this time Fuller's estimates are significantly higher than Ottinger's. Finally, Fuller et al. estimates vegetation damage from air pollution. Both Fuller and Ottinger agree in general that NO_x is the primary source of vegetation damage, and their estimates of \$0.02 - \$0.03/kg are close. These results are shown in right four columns of Table 5.

The use of a macro-economic/global climate model to estimate a "carbon tax" which would be the price of damages from pollution has been attempted by Nordhaus (1994). He used a model which would estimate the appropriate tax at a given point of time to optimize the amount of pollution, trading off economic costs of damages due to greenhouse gases and the damages due to imposing the tax. He estimates the appropriate tax at \$5.29 in tons of carbon equivalent for the 1990s.

However, environmentalists propose much higher carbon taxes, proposals range from \$52.80/tonne to \$179.40/tonne (IBI, 1995). These values are significantly higher than that recommended by Nordhaus, which we use. Nordhaus's results already factor in the optimization required to compare the costs of damages to that of prevention, developing an equilibrium solution, while the other estimates consider only the cost of damage (and a high estimate at that), disregarding the economic burden imposed by the new tax or the changes in behavior required to obtain equilibrium. Clearly, this value is subject to a significant amount of controversy and the consensus of estimated damage, if one is arrived at, is likely to change over time.

3.4 Integration

3.4.1 Highway

Combining the data in Tables 4 and 5 (summarized in Table 12), for cars, we have a cost of \$0.0052/vkt, (\$0.0035/pkt) or \$5.20 for a 1000 km trip. Miller and Moffet (1993) calculate car and light truck pollution costs to be about \$0.024/pkt - \$0.042/pkt. This is almost ten times higher than our estimate. Their estimates for the cost of carbon dioxide emissions is almost 20 times more than ours. Other pollutant cost estimates were higher, and more pollutants were priced, including CFCs, which are being phased out. Our estimate (excluding the cost of carbon emissions and greenhouse effects) is near the low end of estimates in Table 6 (IBI 1995).

Our estimates of costs of carbon was \$0.0003/pkt by car. These estimates are significantly lower than some European and other U.S. estimates. IWW/INFRAS (1995) estimates the external cost of climate change for cars at E0.0066/pkt (ECU), E0.0027/pkt for buses, and E0.01066/tkt for trucks. The principal cause of the difference is the \$52.80/tonne proposed carbon tax in Europe (with the higher year 2000 estimates using a \$123.20/tonne carbon tax), as compared with the \$5.80/tonne carbon tax for 1995 (based on Nordhaus, 1994) used in our study. The Miller and Moffett study assumed an even higher carbon tax, \$82.80/tonne - \$179.40/tonne.

An important point is the consequences of changes in emission factors. The total estimates of damage in a region are divided by an estimate of total emissions to obtain a cost per kg of emittant. If the rate of emission is increased, but the total damage is constant, then the economic damage per unit of emission declines.

3.4.2 Air

Combining the data in Tables 4 and 5 (summarized in Table 12), the cost of air pollution caused by air travel (basically the health damages from particulates, sulfur oxides, hydrocarbons, carbon monoxide, and nitrogen oxides, plus the greenhouse damages due to carbon) is \$0.0009/pkt, or for a 1000 km trip, approximately 89 cents,

which at \$49 per trip is 1.8% of the fare. Our estimate of \$0.0003/pkt by air travel (again excluding carbon) is lower than the lowest estimate provided in Table 6. IWW/INFRAS (1995) estimates E0.0098 for passenger air, and E0.0505/tkt for air freight. Our estimates of costs of carbon was \$0.0005/pkt for air travel. By our calculation, air travel is less environmentally damaging than car travel.

4. ACCIDENTS

4.1 Measurement and Generation

There is some debate as to whether accidents are properly considered social costs, since they are generally borne within the transportation sector. However, the consequences of multi-party accidents are clearly in part external to the individual or vehicle which causes it. For that reason, rather than for any attempt at purity in a definition of externalities, we include them here. However, to include the cost of accidents as a social cost means defining the cost of insurance as a transfer. Accident costs and insurance costs are not additive in an estimate of the full cost of transportation.

4.1.1 Highways

There are a number of sources recording highway accidents. The National Highway Traffic Safety Administration has two databases: NASS - the National Accident Sampling System and FARS, the Fatal Accident Reporting System. In addition, each state keeps records, as does the insurance industry with its National Council on Compensation Insurance DCI (Detailed Claims Information) database. Accidents and injuries are typically classified by their degree of severity (Killed/Fatal Injury, Incapacitating Injury, Non-Incapacitating Injury, Possible Injury, Property Damage). Only a small proportion of accidents result in death or incapacitating injury.

While accidents are often assumed to occur at a fixed rate, this “linearity” conjecture should not be assumed to be true. Some work has been attempted to estimate the rate of accidents as a function of traffic. A relevant study was conducted by Sullivan and Hsu (1988) who estimate a model of freeway accidents in California with the

dependent variable equal to the square root of the total number of annual accidents in the section during the peak periods 5:00 - 9:30 a.m. or 3:00 -7:30 p.m. This model is a total accident rate (TAR_h) model, given in equation (4-1). It can be converted to an average accident rate (AAR_h) by dividing by Q_h or a marginal accident rate (MAR_h) model by taking the first derivative with respect to Q_h . We define the variable “a” as a constant reflecting all the variables multiplied by their respective coefficients other than Q_h . (The variable NONE in theory may depend on Q_h , but we will assume for now that the section has been designed sufficiently with no queueing, so that NONE equals one).

$$(4-1) \quad TAR_h = (a + 0.000143 Q_h)^2$$

$$(4-2) \quad AAR_h = TAR_h/Q_h = (a + 0.000143 Q_h)^2/Q_h$$

$$(4-3) \quad MAR_h = \bullet TAR_h / \bullet Q_h = (0.000286) (a) + (2) 0.000143^2 Q_h$$

$$(4-4) \quad a = 0.19 L \cdot N + 1.92 IRAMP - 0.98 ARAMP - 0.017 NONE$$

where:

$L \cdot N$ = The section length (L) in miles times the number of travel lanes (N) (excluding auxiliary lanes)

IRAMP = The average number on-ramps per mile

ARAMP = IRAMP if there are auxiliary lanes , 0 if there are no auxiliary lanes in the section,

Q_h = The average hourly traffic volume in all lanes during the peak period

NONE = The average percentage of time during the peak period when no queue exists in the freeway section.

4.1.2 Air

A similar classification to that for highways is given by the National Transportation Safety Board (1992) for major air carriers (Fatal, Serious Injury, Minor Injury, No Injury). However, the annual variance in the number of deaths in the air

transportation system is quite high (for large carriers 285 fatalities in 1988 vs. 53 in 1992 as shown in Table 7), a single accident can result in hundreds of death, therefore any developed accident rate should be based on a multi-year sample.

Aviation accident statistics are collected by the National Transportation Safety Board. Table 7 compares average accident rates for large airlines and commuter airlines over the 1988-92 period. There are no clear trends over time for the years 1988-92.

4.2 Valuation

The method presented here uses a comprehensive approach which includes valuing years lost to the accident as well as direct costs. Several steps must be undertaken: converting injuries to years of life, developing a value of life, and estimating other costs. Placing a value on injury requires measuring its severity. Miller (1991) describes a year of functional capacity (365 days/year, 24 hours/day) as consisting of several dimensions: Mobility, Cognitive, Self Care, Sensory, Cosmetic, Pain, Ability to Perform Household Responsibilities, and Ability to Perform Wage Work.

Central to the estimation of costs is an estimate of the value of life. Numerous studies have approached this question from various angles. Jones-Lee (1990) provides one summary, with an emphasis on British values from revealed and stated preference studies. The FAA (1989) provides another summary. He finds the range of value of life to vary by up to two orders of magnitude (a factor of 100). Miller's (1991) summary is reproduced in Table 8, with numbers updated to 1995 dollars.

After converting injuries to functional years lost, combining with fatality rates, and value of life, a substantial portion of accident costs have been captured. But this data must be supplemented by other costs, including hospitalization, rehabilitation, and emergency services. Taking the comprehensive costs, they can be allocated to the various accident categories by severity as shown in Table 9. Based on California accident data, we have estimated the cost of an urban accident at \$70,000 and a rural accident at \$120,000. While there are more urban accidents, they are at lower speed and less likely to result in serious injury or death.

4.3 Integration

4.3.1 Highway

Application of the accident model developed above will provide us an estimate of the accident cost per passenger kilometer traveled. The average annual accident rate per hour at a level $Q_h = 6000$ vph and $a = 0.61$ (when the following conditions prevail: 1 km section, 4 lanes wide, 0.12 intersections per km, no queueing) is 0.00036. Dividing by 365 (days per year), and then multiplying by 33% (the proportion of four and half hour peak period traffic in the peak hour), we get the probability of an accident per hour per vehicle is 0.000 000 32. Multiplying this by the cost of an accident, we calculate \$0.038/vkt for rural travel (which have higher fatality rates) or \$0.022/vkt for urban travel. Clearly the value resulting depends upon the assumptions made. Taking the rural travel cost and converting from vkt to pkt (at 1.5 person per vehicle) gives \$0.026/pkt while the urban cost is \$0.015/pkt, with a central value around \$0.020/pkt. This and previous estimates are given in Table 10.

These results are consistent with, though not identical to international studies. Australian data (ABTC 1992) shows an average cost per accident of \$AU 10,378. This result is significantly lower than American figures, principally due to a lower value of life in the Australian method, which is not as comprehensive as in the United States. IWW/INFRAS (1995) compute costs of accidents using a macroscopic methodology, computing national estimates of fatality and injury costs. Their European average was in European Currency Units, E0.032/pkt for cars, E0.009/pkt for buses, E0.022/tkt for trucks, E0.0019/pkt for passenger rail, and E0.0009/tkt for freight rail. Given the variation of exchange rates, these figures are consistent with our estimate.

4.3.2 Air

A similar calculation could be performed for air travel. However, because the accidents are fewer, and vary a great deal in magnitude, accident rates are not stable on a yearly basis. Similarly, it is difficult to establish with confidence any costs beyond loss of life using the value of life idea discussed above.

If, for large airlines we have 0.005 fatal accidents per million aircraft km, an average number of passengers per flight of 100, an average of 25 deaths per fatal crash, and a value of life of \$2.7 million, then the cost for accidents on large aircraft is \$0.00054/pkt. Taking more conservative values of life and including non-life costs (injury and medical, accident cleanup, etc.), and assuming a higher number of fatalities could quadruple the estimate to \$0.0022/pkt.

This range of estimates is consistent with Canadian estimates of accident costs: \$0.001/pkt (CAN94) (IBI 1995). Australian data (ABTC 1992) show an estimate of \$1,259,000 (AU88) total cost per fatal accident, multiplied by the U.S. accident rate gives a cost of \$AU 0.0006/pkt, which is also within the same order of magnitude as our estimates. However, given the experience with Australia's highway estimates, their estimate is probably better seen as a lower bound.

5. CONGESTION

5.1 Measurement

The time which a trip takes can be divided into two components, uncongested and congested times. The uncongested time is a simple function of distance and uncongested speed. Congested time depends on the number of other vehicles on the road as well as numerous random factors (the weather, drivers attention, local design conditions). In this research, we look only at recurring congestion, due to a flow in excess of capacity, rather than at incidents. Certainly incidents and other non-recurring congestion are a significant cost. While the uncongested time is clearly an internal cost, congestion, like accidents, but unlike the other externalities, is both internal to the transportation system and external to the individual traveler (Nijkamp, 1994). As the system approaches "capacity", a vehicle imposes an increasing amount of delay on all other vehicles in the system, which has ramifications both within and outside the transport sector. The increased cost of transportation rebounds in the productive sectors of the economy, reducing the amount of time and money that can be spent in other activities and on other goods. In our analysis,

congestion is considered an externality on the basis of the proposition that it is external to the vehicle.

In this paper both highway and air transportation are considered subject to congestion effects. It is important to recognize that volume-delay relationships are non-linear, so the marginal congestion cost imposed by each vehicle depends on the number of vehicles. For limited access highways, the point of maximum throughput typically has a speed which is one-half of the freeflow speed. For signalized highways, the relationships are much more complex, and must consider delay at intersections caused by traffic on other links, however since we limit ourselves to intercity transportation, this complexity is ignored. Most of the congestion delay associated with air travel occurs at and around airports. In both cases, for highways and airports, the amount of delay depends on both supply and demand.

5.2 Generation

5.2.1 Highway

The exact relationship between volume and delay can be best determined by a detailed, site specific, engineering study. For highways, the Highway Capacity Manual (TRB 1985) provides some estimates. For a segment with a 112 kph design speed, under ideal conditions the capacity is taken to be 2000 passenger cars per hour per lane (pcphpl). The following equation for limited access freeways is derived from the Highway Capacity Manual Table 3-1 (TRB 1985).

$$(5-1) \quad AD_{ht} = 0.32 * (Q_h / Q_{ho})^{10}$$

where: AD_{ht} = Average delay per vehicle kilometer (minutes)

Q_h = Flow per unit time (e.g. vehicles/hour)

Q_{ho} = Capacity per unit time

5.2.2 Air

There have been some studies of airport delay, perhaps the most widely used approach is that of the FAA (1983). Using a methodology similar to the highway

capacity manual, each airport, based on runway designs and other physical factors, has a rated capacity (annual service volume). Delay per aircraft depends on the usage (in operations) of the airport relative to its capacity. The following average delay per aircraft (in minutes) was estimated using the FAA graphs:

$$(5-2) \quad AD_{at} = 0.19 + 2.33 (Q_a/Q_{ao})^6$$

where: AD_{at} = Average delay per aircraft

Q_a = Aircraft Operations per year

Q_{ao} = Annual Service Volume

5.3 Valuation

The value of time depends on a number of factors (Hensher 1995). Among them are the mode of travel, the time of day, the purpose (business, non-business) of the trip, the quality or level of service of the trip (including speed), and the specific characteristics of the trip-maker, including income. Furthermore, the value of time saved probably depends on the amount of time saved - 60 people saving 1 minute may not be worth the same as 1 person saving 60 minutes. Time in motion is valued differently than time spent waiting. Similarly schedule delay, the amount of time between when one wants to depart and the next scheduled service (bus, train, plane) also has a value associated with it. Unexpected delays are more costly than the expected, since those are built into decisions. All of these factors would need to be considered in a detailed operational analysis of the costs of travel time and congestion.

There are a number of approaches for valuing travel time, ranging from utility theory to theories of marginal productivity (FAA 1989). Economic theory holds that a firm in a competitive market will be in equilibrium when the marginal revenue product of a factor of production equals its price. In other words, the last good which is produced still earns money, but the next one won't. If labor is taken to be an input to the firm, the firm will pay salaries up to the point that the worker adds marginal revenue to the firm, this is his earning rate. Given those assumptions, some take the value of time for the business traveler to be the wage rate, since travel substitutes for work. Of course, this

ignores any differences in the quality of the trip, the fact that work can be done while traveling, that much business travel occurs on the employee's rather than the employer's time, and a number of other factors. It also creates problems for valuing the time of non-business travel.

The extension to non-business travel assumes that the consumer values non-business activities the same at equilibrium, (otherwise they would expend more time on the activity with the higher value). Since one of those equilibrium activities to which the consumer is indifferent is work, it is plausible to value non-business travel at the wage rate as well. Extending the household production theories of Becker (1965), it can be assumed that households perform activities which maximize utility, including expenditures of both time and money. Since travel itself is an intermediate activity, and thus provides no utility, the time saved in travel (for instance, due to an improvement) can be spent either consuming leisure activities or earning income. Therefore the value of the in travel must be compared with its time at work and at home. Thus, the value of time saved can be greater or less than the wage rate depending on the value of time in travel (is it positive or negative?), as well as the valuation of work, and the wage rate cannot be assumed to be the only factor used in estimating the value of time.

A large number of studies have estimated the value of travel time (FAA 1989). These studies use several approaches, often grouped under the willingness to pay rubric. A number of studies calculate elasticity of demand to estimate how much money people pay to save time. Early studies were based on regression analysis, more recently multinomial logit has been used. Miller and Fan (1992) have collected estimates of value of time from a variety of studies of inter-city transportation, shown in Table 11.

5.4 Integration

5.4.1 Highway

Recall the delay expression from above, this average delay is the average cost in minutes per mile or minutes per kilometer, composed of two parts, a fixed portion

reflecting the uncongested time to travel, which is a private cost, and the variable portion which is a function of volume, which is the result of an externality from other drivers.

The total delay (TD_{ht}) is simply the average cost multiplied by the total number of users (Q), while the marginal delay (MD_{ht}) is simply the derivative of the total delay .

$$(5-3) \quad TD_{ht} = 0.32 * (Q_h)^{11}/(Q_{ho})^{10}$$

$$(5-4) \quad MD_{ht} = \bullet TD_{ht} / \bullet Q_h = 3.5 * (Q_h / Q_{ho})^{10}$$

The above equations can be monetized by multiplying the cost, which is given above in minutes per mile by a value of time. The delay results graphed in Figure 2, these can easily be multiplied by a value of time (for instance \$10/hour) to obtain costs at different congestion levels.

To compare, Miller and Moffet (1993), while recognizing the problematic nature of a general cost, estimate a national average of \$0.0021/pkt spread across all drivers. This is within our broad range of marginal costs of \$0.00/pkt when uncongested ($Q_h/Q_{ho} < 0.75$) to \$0.60/pkt at capacity at \$10/hour. For comparison purposes, we select a value \$0.005/pkt. This estimate is consistent with the idea of approximately free flow travel for five of the seven hour automobile trip such as between San Francisco - Los Angeles and a 10 kph reduction in speed for the other two hours.

5.4.2 Air

For airport delay, we can undertake a similar exercise. Again, the average delay equation is simply the average cost in units of minutes, as a function of operations and capacity (annual service volume) as described above, the total delay (TD_{at}) and marginal delay (MD_{at}) are given below in units of minutes.

$$(5-5) \quad TD_{at} = AD_{at} * Q_a = 0.19 Q_a + 2.33 Q_a^7 / Q_{ao}^6$$

$$(5-6) \quad MD_{at} = \bullet TD_{at} / \bullet Q_a = 0.19 + 16.31 (Q_a / Q_{ao})^6$$

Again the issue of double counting needs to be addressed. Because congestion costs depend on volume, and volume depends on fares (and thus costs), the two should be solved simultaneously if any attempt is made to internalize this cost. As before, the above delay measures can be monetized by multiplying by a value of time. For comparison with other modes, we use a typical congestion cost of \$0.0017/pkt, which is consistent with data representing the San Francisco - Los Angeles air trip.

6. SUMMARY AND CONCLUSIONS

In the previous sections we calculated the noise, air pollution, accident, and congestion costs for intercity highway and air travel. A summary of the long run average costs of externalities is shown in Table 12.

Our estimates of the cost of noise for highway and air travel are approximately equal, at about \$0.004 - 0.005/pkt for both. However, we have reason to believe that over the long term the cost by air will decline relative to that by highway. In the case of air we have not taken into consideration the upcoming switch to stage III aircraft which is mandated as of the year 2000. With the advent of stage III aircraft one can expect at least a halving of the cost of airport noise at current airport utilization rates. The aircraft noise cost estimates are further based on a broad cross-section of estimates from other countries. The location of major airports in the United States are in areas of somewhat lower density than elsewhere, and more importantly, have approach and departure flight paths which can often be located over water, which further reduces the noise externality.

Our estimates of air pollution are probably the most subject to challenge. There is considerable debate about the magnitude of health damages associated with criteria pollutants. Moreover, we have placed no value on the environment for the sake of the environment. It is clear that the pollution damage by auto is significantly higher than by airplane. The cost of global climate change due to carbon emissions is an equally slippery area. There is a more than tenfold range in the estimates of these costs, we have chosen what we believe a reasonable estimate, though others will surely disagree.

Accidents are the highest social cost of intercity highway travel, and the lowest of air travel, indicative of the different levels of safety of each. Much of the accident costs

are borne by travelers in the form of insurance, some by society covering the uninsured, particularly health costs. While we made little effort to attribute incidence in this paper, accident costs fall mostly within the travel sector, even if not borne by the individual who causes the accident.

Congestion costs are another difficult area, in that congestion levels are facility specific, and depend on traffic flows on highways and at airports. We have estimated congestion levels comparing a typical intercity corridor: Los Angeles to San Francisco, assuming a relatively low value of time of \$10 per hour. If the congestion costs were to be charged to travelers in the form of marginal cost pricing, we would have to be careful to avoid double counting, as demand depends on the toll and vice versa. The appropriate toll needs to be solved simultaneously with the demand in order to make an accurate estimate. In the final analysis, the optimal pricing strategy depends on optimizing the trade-off between expanding supply (capacity) and constricting demand, through pricing or some other mechanism, and potentially accepting some amount of delay as being less costly than mechanisms to reduce it.

Given their small magnitude, it should be noted that social costs play a relatively minor role in the comparison of total costs across modes, they are about 5% of the full cost of air travel and 15% of the full cost of highway travel (Levinson et al 1996). The relatively high social cost of highway transportation is primarily due to the cost of accidents, an externality which is largely absent in air travel. The accident and congestion externalities are already partially internalized to travelers making decisions, as the accident externality generates higher insurance costs while congestion increases travel time. The most relevant externalities are therefore air pollution and noise. Air pollution and noise have approximately equal costs in the case of highway transportation, while for air travel, noise appears to be the major source of social costs. These estimates can form part of an analysis of the full costs of intercity passenger transportation, which can be used for investment, financing, and pricing studies. While in many markets air and auto are not good substitutes (trips are either too short for air or too long for car), in other medium distance markets they are. In those markets, understanding the trade-offs between the modes is essential to good planning.

7. REFERENCES

- Australian Bureau of Transport and Communications. 1992. Social Cost of Road Accidents in Australia, Economics Report 79. Australian Government Publishing Service: Canberra.
- Barakat and Chamberlin. 1990. Contribution of the Transportation Sector to Atmospheric Pollution Problems, Report Prepared for the Research Division Royal Commission on National Passenger Transportation. RES 90-02
- Becker, Gary. 1965. *A Theory of the Allocation of Time*. Economic Journal 75, 299 (Sept. 1965): 493-517
- Bureau of Transportation Statistics. 1994. 1994 Annual Report, p50, fig 3-1, United States Department of Transportation: Washington.
- Button, Kenneth. 1994. *Alternative Approaches Toward Containing Transport Externalities: An International Comparison* . Transportation Research A 28,4: 289-305.
- Button, Kenneth. 1990. *Environmental Externalities and Transport Policy* . Oxford Review of Economic Policy. 6,2:61-75 (Summer 1990)
- California Air Resources Board. 1991. Methodology to Calculate Emission Factors for On-Road Motor Vehicles. July 1991. California Air Resources Board: Sacramento.
- California Highway Patrol. 1993. Annual Report of Fatal and Injury Motor Vehicle Traffic Accident (HE 5614.3 C241)
- Coase, Ronald H. 1992. *The Problem of Social Cost, and Notes on the Problem of Social Cost* reprinted in The Firm, The Market and the Law University of Chicago Press: Chicago.
- Delucchi, Mark A. 1991. Emissions of Greenhouse Gases from the Use of Transportation Fuels and Electricity: Volume 1 Main Text. United States Department of Energy: Argonne National Laboratory, Center for Transportation Research, Energy Systems Division.
- Delucchi, M.A. 1996. The Annualized Social Cost of Motor-Vehicle Use in the United States, based on 1990-1991 Data UCD-ITS-RR-96-3 University of California at Davis Institute of Transportation Studies, Davis CA
- Energy Information Administration. 1994. Emissions of Greenhouse Gases in the United States 1987-1992, Nov. 1994. United States Department of Energy: Washington.
- Environmental Protection Agency. 1988. Procedures for Emission Inventory Preparation, Volume IV: Mobile Sources. Office of Air Quality Planning and Standards, United States Environmental Protection Agency: Research Triangle Park, NC (December).

- Federal Aviation Administration. 1989. Economic Value for Evaluation of FAA Investment and Regulatory Programs, June 1989 United States Department of Transportation: Washington.
- Federal Aviation Administration 1983. Airport Capacity and Delay (AC 150/5060 -5), United States Department of Transportation: Washington.
- Federal Highway Administration. 1993 Highway Statistics 1992, Office of Highway Information Management FHWA USDOT (HE 355.A3.A36 1992)
- Fuller, John, Barry Hokanson, John Haugard, and James Stoner. 1983. Measurements of Highway User Interference Costs and Air Pollution and Noise Damage Costs. Institute of Urban and Regional Research, University of Iowa (NS 83-817)
- Government Accounting Office. 1992. Air Pollution: Global Pollution From Jet Aircraft Could Increase in the Future. GAO/RCED-92-72 p.19 Washington.
- Gillen, David W., T.H. Oum, and M.W. Tretheway (1987), Measurement of Social Costs: An Application to Toronto International Airport, Centre for Transportation Studies, University of British Columbia, Vancouver, B.C., Canada.
- Gillen, David W. 1990. The Management of Airport Noise, DWG Research Associates for Transport Development Centre, Transport Canada, July 1990
- Greene, David L. 1993. *Transportation and Energy: The Global Environmental Challenge*. Transportation Research A 27A, 3:163-167.
- Gwilliam, Kenneth M. and Harry Geerlings. 1994. *New Technologies and Their Potential to Reduce the Environmental Impact of Transportation* Transportation Research A 28A,4: 307-319
- Harley, Robert. 1996. *Measuring and Controlling Automobile Emissions*. Presentation at the University of California at Berkeley, Institute of Transportation Studies, Transportation Science Seminar. September 27, 1996
- Hensher, David A. 1995. *Value of Travel Time Savings in Personal and Commercial Automobile Travel*. prepared for Conference on Social Cost-Benefit Analysis, Sponsored by US Bureau of Transportation Studies, Irvine CA July 6-8, 1995.
- IBI Group. 1995. Full Cost Transportation Pricing Study: Final Report to Transportation and Climate Change Collaborative. Ottawa.
- INFRAS,IWW. 1995. External Effects of Transport. International Union of Railways, IWW - Karlsruhe University, INFRAS Consultants.
- INRETS. 1993. Impact des Transports Terrestres sur L'Environnement: Methodes d'evaluation et couts sociaux. report # 23, Institut National de Recherche sur les Transport et Leur Securite, , Sept. 1993 p. 61
- Jones-Lee, Michael. 1990. *The Value of Transport Safety* Oxford Review of Economic Policy, 6,2:39-60 (Summer 1990)
- Keeler, T.E., K. Small, and Associates. 1975. The Full Costs of Urban Transport, Part III: Automobile Costs and Final Intermodal Cost Comparisons, Monograph No. 212,

- Institute of Urban and Regional Development, University of California at Berkeley.
- Knight, Frank H. 1924. *Some Fallacies in the Interpretation of Social Cost*, Quarterly Journal of Economics, 38: 582-606.
- Levinson, David, David Gillen, Adib Kanafani and Jean-Michel Mathieu. 1996. The Full Cost of Intercity Transportation: An Intermodal Comparison. (UCB-ITS-RR-96-3) University of California at Berkeley, Institute of Transportation Studies, Berkeley CA.
- Litman, Todd. 1995. Transportation Cost Analysis: Techniques, Estimates, and Implications. Victoria Transport Policy Institute, Victoria, BC
- Mackenzie, James, Roger C. Dower, Donald D.T. Chen. 1992. The Going Rate: What it Really Costs to Drive. World Resources Institute. Washington, DC
- Maggi, Rico. 1994. *Environmental Implications of Missing Transport Networks in Europe* Transportation Research A 28A,4: 343-350.
- Miller, Eric and Fan, Kai-Sheng 1992. *Travel Demand Behavior: Survey of Intercity Mode-Split Models in Canada and Elsewhere* in Directions: The Final Report of the Royal Commission on National Passenger Transportation, Vol. 4, Ottawa, Canada: Ministry of Supply and Services, 1992
- Miller, Peter and John Moffet. 1993. The Price of Mobility: Uncovering the Hidden Costs of Transportation (Oct. 93). National Resources Defense Council : San Francisco
- Miller, Ted. 1992. The Costs of Highway Crashes (FHWA-RD-91-055). United States Federal Highway Administration. Washington.
- Modra, J. D. and Bennett, D.W. 1985. *Cost-Benefit Analysis of the Application of Traffic Noise Insulation Measures to Existing Houses*. Forum Papers of 10th Australian Research Forum, Melbourne 13-15 May 1985, Vol. 1, p. 63-86.
- National Safety Council. 1993. Accident Facts: 1993 Edition, United States Government: Washington
- National Transportation Safety Board. 1992. Annual Review of Aircraft Accident Data: U.S. Air Carrier Operations Calendar Year 1992. United States Department of Transportation: Washington
- Nelson, Jon P. 1982a. *Airports and Property Values: A survey of recent evidence* , Journal of Transport Economics and Policy, Jan 1980, p43
- Nelson, Jon P. 1982b. *Highway Noise and Property Values: A survey of recent evidence*, Journal of Transport Economics and Policy, May 1982, p128
- Nijkamp, Peter. 1994. *Roads Toward Environmentally Sustainable Transport* Transportation Research A 28A,4: 261-272.
- Nordhaus, William. 1994. Managing the Global Commons. MIT Press, Cambridge MA
- Ottinger et al. 1990. Environmental Costs of Electricity. Pace University Center for Environmental and Legal Studies: Buffalo.

- Pickrell, Donald. 1995. *The Global Warming Problem*. Presentation at the University of California at Berkeley, Institute of Transportation Studies, Transportation Science Seminar. March 22, 1995.
- Pigou, A.C. 1932 (1920 orig.) The Economics of Welfare, 4th ed. Macmillan and Co: London.
- Quinet, Emile. 1990. The Social Cost of Land Transport OECD Environment Monograph No. 32 April 1990 Paris.
- Rietveld, Piet. 1994. *Spatial Economic Impacts of Transport Infrastructure Supply*. Transportation Research A. 28A,4:329-341.
- Rothengatter, Werner. 1994. *Do External Benefits Compensate for External Costs of Transport*. Transportation Research A 28A,4:321-328.
- Small, Kenneth A. and Camilla Kazimi. 1995. *On the Costs of Air Pollution from Motor Vehicles*, Journal of Transport Economics and Policy, Jan. 1995, p7-32
- Spulber, Daniel. 1989. Regulation and Markets. MIT Press. Cambridge, MA
- Starkie, D.N.M. and D.M. Johnson The Economic Value of Peace and Quiet Saxon House/ Lexington Books, 1975 (TD 892 S73)
- Transportation Research Board 1985 Highway Capacity Manual, Special Report 209, Transportation Research Board: Washington.
- United Kingdom Department of Transport Calculation of Road Traffic Noise, Department of Transport, Welsh Office, HMSO, 1988.
- Verhoef, Erik. 1994. *External Effects and Social Costs of Road Transport* Transportation Research A 28A,4: 273-387.
- Wootton, H.J. and M. L. Poulton. 1993. Reducing carbon dioxide emissions from passenger cars to 1990 levels, Transportation Research Laboratory, United Kingdom Department of Transport, PA 3016/93, Environment Resource Centre, TRL, Crowthorne, Berkshire
- Works Consultancy Services Ltd. 1993. Land transport externalities: no. 19. Transit New Zealand, Wellington, New Zealand.

8. TABLES AND FIGURES

Table 1: Noise Depreciation Near Highways

Researcher	Site	NDI	Year
Towne	Seattle, WA	negligible	1968
Diffey	London	0	1971
Gamble et al.	all 4 areas	0.26	1970
	N. Springfield VA	0.21	1970
	Bogata NJ	2.22	1970
	Rosedale, MD	0.42	1970
	Towson, MD	0.26	1970
Anderson and Wise	all 4 areas	0.25	1970
	N. Springfield VA	0.14	1970
	Towson, MD	0.43	1970
Hammar	Stockholm	1.4	1972
Vaughn, Huckins	Chicago	0.65	1974
Nelson	Washington DC	0.87	1975
Langley	No. Springfield VA	0.32	1977
Bailey	No. Springfield VA	0.30	1977
Abelson	Sydney, NSW	0.56	1977
Hall et al.	Toronto, ON	1.05	1977
Langley	No. Springfield VA	0.40	1980
Palmquist	Kingsgate, WA	0.48	1980
	N. King Co. WA	0.30	1980
	Spokane, WA	0.08	1980
Allen	No. Virginia	0.15	1980
	Tidewater	0.14	1980
Taylor et al	Southern Ontario	0.5	1982
Holsman, Bradley	Sydney, NSW	0.72	1982
Pommerehne	Berlin	1.2	1985
Hall and Willard	Toronto/Vic. Park	0.335	1987
	Toronto/Leslie St.	2.10	1987
	Toronto/Etobicoke	0.39	1987
	pooled	0.70	1987
Soguel	Neuchatel	0.91	1989
Streeting	Canberra	0.90	1989
Swiss (X)	Basle, SWITZ.	1.26	
	AVERAGE	0.62	

Table 2: Noise Depreciation Near Airports

Researcher	Study Area	Range of noise level	Range of NDI	Best NDI (NEF)	Year	Average House Value
			(%)	(%)		
Paik	New York	20-40	1.9-2.0	1.9	1960	\$16,656
Paik	Los Angeles	20-40	1.8-2.0	1.8	1960	\$19,772
Paik	Dallas	20-40	2.3-2.6	2.3	1960	\$18,011
Emerson	Minneapolis	20-50	0.4	0.58	1967	\$19,683
Dygert	San Francisco	25-45	0.5-2.0	0.50	1970	\$27,600
Dygert	San Jose	25-45	0.1-1.5	0.70	1970	\$21,000
Price	Boston	25-45	0.6	0.83	1970	\$13,000
Mieszkowski	Toronto/ Etobicoke	20-35	0.3-1.3	0.50	1969-73	
De Vany	Dallas	20-55	0.2-0.8	0.58		
Nelson	Washington, DC	20-35	1.0-1.1	1.10	1970	\$32,724
	Rochester		0.55	0.55	1980	
	Sydney/ Marrickville		0.50	0.50	1980	
	Edmonton		0.50	0.50	1980	
	London		0.68	0.68	1980	
O'Byrne	Atlanta					
Pennington	Manchester	27-40		0.47	1990	£30,886
Gillen, Levesque	Toronto	0-40		0.18	1990	C195,809
	AVERAGE			0.62		

Table 3: Noise Costs Generated by Air Travel

Country	Average Cost \$/pkt
Canada	0.0039
Germany	0.0049
Italy	0.0079
Holland	0.0099
Sweden	0.0014
Switzerland	0.0017
France	0.0030
United Kingdom	0.0018
Average	0.0043

source: Quinet 1990, IBI 1995

note: all values converted to \$US, 1995

Table 4: Emissions Factors (gm/pkt)

	Jets ¹	Highways ¹	Gasoline Car ²	Light duty diesel truck ²	Heavy duty diesel truck ²
Passenger km traveled	5.8 x 10 ¹¹	5.4 x 10 ¹²			
<u>Pollutant</u>					
CO	0.28	6.053	8.125	1.000	5.828
VOC	0.093	0.95	2.348	0.226	1.472
NOx	0.13	1.11	0.787	0.933	9.801
SOx			0.038	0.076	0.360
PM10			0.024	0.247	1.474
C	100	46			

Source:

(1) GAO (1992), Bureau of Transportation Statistics (1994) Annual Report; Carbon info from Energy Information Agency, page 102 (1994);

(2) Small and Kazimi (1995), 1992 Fleet Average, (gm/km) from EMFAC7F, updated for VOC underestimate by 2.1.

Note: pkt = Passenger Kilometer Traveled; Data for 1989 VOC = volatile organic compounds, CO = Carbon Monoxide, NOx = Nitrous Oxides, SOx = Sulfur oxides, PM10 = particulate matter, C = Carbon;

**Table 5: A Comparison of Estimates of Health, Material, and Vegetation Effects
(\$/kg)**

Pollutant	Health Damage		Materials Damage		Vegetation Damage		
	Fuller	Ottinger	S&K	Fuller	Ottinger	Fuller	Ottinger
CO	na	na	na	\$0.0063	na	na	na
VOC + NOx	\$1.22	\$1.64	\$3.04	\$1.19	\$0.03	\$0.025	\$0.03
SOx	\$0.84	\$4.61	\$13.82	\$1.60	\$0.31	\$0.0019	\$0.00
PM10	\$1.20	\$0.94	\$12.85	\$1.03	\$0.00	na	\$0.00

note: Fuller et al. (1983) updated to 1995 U.S. dollars using medical care inflation rates, Ottinger (1990) updated from 1990 Can to 1995 U.S. dollars, S&K: Small and Kazimi (1995) in 1995 U.S. dollars, Los Angeles region. \$2.7 M Value of Life

Table 6: Costs of Air Pollution, Comparison of Studies

MODE	Hansson/ Markham	Kageson/ T&E	Planco	Swiss MoT	INFRAS/ IWW
Cars	0.43 - 1.44	0.47 - 1.86	2.26	0.15	0.35 - 1.33
Trucks	1.03 - 1.71	0.50 - 0.71	1.48	1.69	0.52 - 2.77
Pass. Rail	0.17 - 0.37	0.08	0.13	0.00	0.08 - 0.44
Freight Rail	0.22	0.08	0.20	0.00	0.03 - 0.15
Air	1.08	0.70	---	---	0.18 - 1.09
Shipping	0.20	---	0.22	---	0.15 - 0.91

Source: IBI (1995) Exhibit 3.4, note: All costs, 1995 U.S. cents per pkt or per tkt

Table 7: U.S. Civil Aviation Accidents, Deaths, and Death Rates

<u>Carrier Type</u>	<u>Accidents</u>		<u>Death</u>	<u>Rate/MVH</u>		<u>Rate/MV</u>	<u>Fatal</u>
	<u>Total</u>	<u>Fatal</u>	<u>#</u>	<u>Total</u>	<u>Fatal</u>	<u>K</u> <u>Total</u>	
Large Airlines	25.8	5.6	141.0	0.0219	0.0046	0.0033	0.0024
Commuter Airlines	19.4	5.0	31.2	0.0884	0.0227	0.0300	0.0080

source: National Safety Council 1993 (p.96), Average 1988-92

note: MVH: Million Aircraft Hours Flown; MVK: Million Vehicle Kilometers.

Table 8: Estimated Value of Life by Type of Study

Type of Study	Value of Life (\$) (1995 dollars)
Average of 49 studies	2.9 M
Average of 11 auto safety studies	2.7 M
Study Type	
Extra wages for risky jobs (30 studies)	2.5 - 4.4 M
Market demand vs. price	
safer cars	3.4 M
smoke detectors	1.6 M
houses in less polluted areas	3.4 M
life insurance	3.9 M
wages	2.7 M
Safety behavior	
pedestrian tunnel use	2.7 M
safety belt use (2 studies)	2.6 - 4.0 M
speed choice (2 studies)	1.7 - 2.9 M
smoking	1.3 M
Surveys	
Auto safety (5 studies)	1.6 - 3.6 M
Cancer	3.4 M
Safer Job	2.9 M
Fire Safety	4.7 M

Source: adapted from Miller (1990),

Note: in millions (M) of after-tax dollars (\$1995 = \$1988 * 1.3).

Table 9: Comprehensive Costs by Severity of Accident

Accident Severity	Cost Per Person	Cost Per Crash
K-Fatal	\$3,110,564	\$3,529,312
A-Incapacitating	220,357	297,138
B-Evident	43,195	62,832
C-Possible	22,138	32,874
O-Property Damage	2,254	5,835
Unreported	2,081	5,387
A-B-C reported nonfatal	60,261	90,469
K-A-B-C reported injury	100,298	150,497

*note: 1995 dollars, assumes 4% discount rate (\$1995 = \$1988 * 1.3)*

source: Miller 1991 (p39)

Table 10: Estimates of Accident Costs

Study	\$/pkt
Levinson et al (1996) rural	\$0.026
Levinson et al (1996) urban	\$0.015
Insurance Costs (24,000 km/yr.)	\$0.025
Insurance Costs (16,000 km/yr.)	\$0.038
U.S. DOT (1975)	\$0.014
Keeler et al (1975) rural	\$0.013
Keeler et al (1975) urban	\$0.016
Erickson (1982)	\$0.002
Gordon (1990)	\$0.02
Jones-Lee (1990)	\$0.018
Vernbergg and Jagger (1990)	\$0.014
U.S. Dept. of Commerce (1990)	\$0.036
Konheim and Ketcham (1991) rural	\$0.028
Konheim and Ketcham (1991) urban	\$0.0552

Source: NRDC (1993), authors

Table 11: Value of Time Business and Non-Business Trips

STUDY	Air	Car	Currency
BUSINESS TRIPS			
Koppelman	\$20-\$60	\$20-\$60	US77
Compass/ Tri-State	\$65-\$67	\$37-\$47	US90
RPI/Cole Sherman New York	\$51	\$26	US90
Horizons: Ontario-Quebec	\$58	\$25	US90
British Rail/ Illinois	\$54	\$23	US90
CRA Texas (linehaul, access)	\$35,\$24	\$20,\$13	US90
NON-BUSINESS TRIPS			
Koppelman	\$15-\$45	\$15-\$45	US77
Compass/Tri-State	\$34-\$42	\$16-\$37	US90
RPI/ Cole Sherman New York	\$32	\$26	US90
Horizons: Ontario-Quebec	\$32	\$18	US90
British Rail/ Illinois	\$19	\$13	US90
CRA Texas (linehaul, access)	\$28,\$19	\$9,\$6	US90

source: adapted from Miller and Fan, 1991, note \$/hr

Table 12: Intermodal Comparison of Long Run Average Costs

Cost Category	Air System \$/pkt	Highways \$/vkt	Highways \$/pkt
Noise	\$0.0043	\$0.0068	\$0.0045
Air Pollution			
CO	\$0.0000018	\$0.000049	\$0.000033
VOC	\$0.0001530	\$0.003850	\$0.0026
NOx	\$0.0001700	\$0.001000	\$0.00067
SOx	---	\$0.000315	\$0.00021
PM10	---	\$0.000085	\$0.000057
Carbon	\$0.0005800	\$0.000260	\$0.00017
Subtotal	\$0.00090	\$0.0056	\$0.0037
Accidents	\$0.0005	\$0.03	\$0.0200
Congestion	\$0.0017	\$0.0069	\$0.0046
TOTAL	\$0.0073	\$0.0492	\$0.0328

note: vehicle occupancy - highways assume 1.5 passengers per car

Figure 1: Highway Noise: Average and Marginal Costs

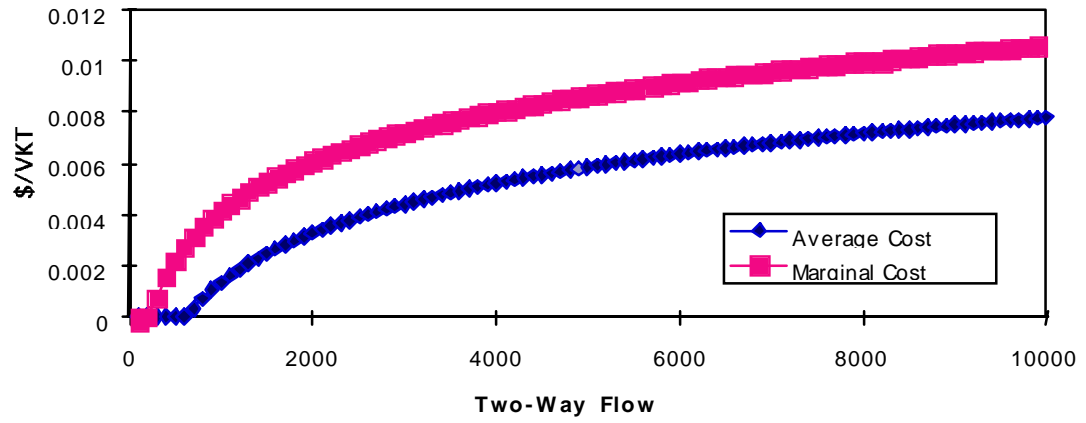


Figure 2: Congestion: Average vs. Marginal Delay of Highway Travel


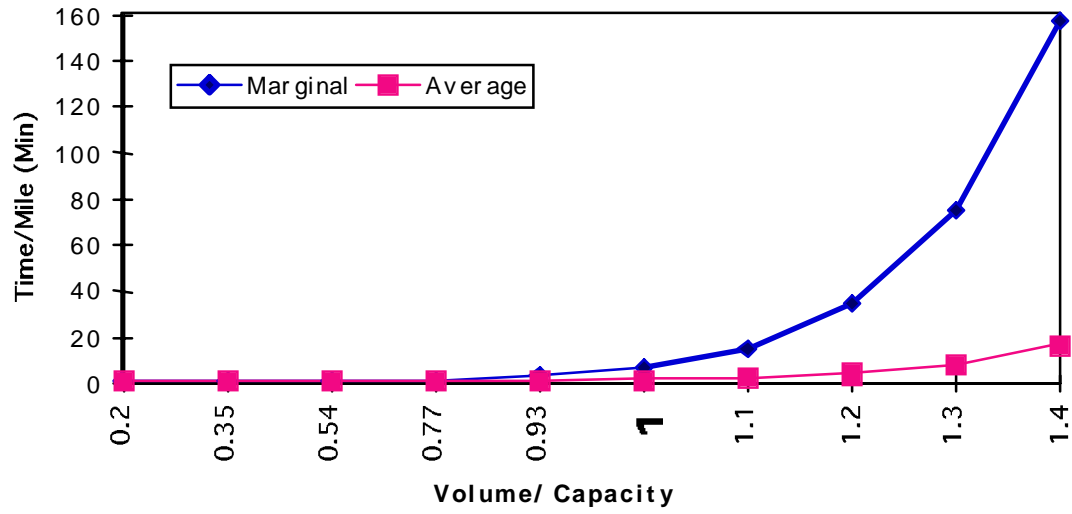


Figure 3: Congestion: Average vs. Marginal Costs of Airport Delay

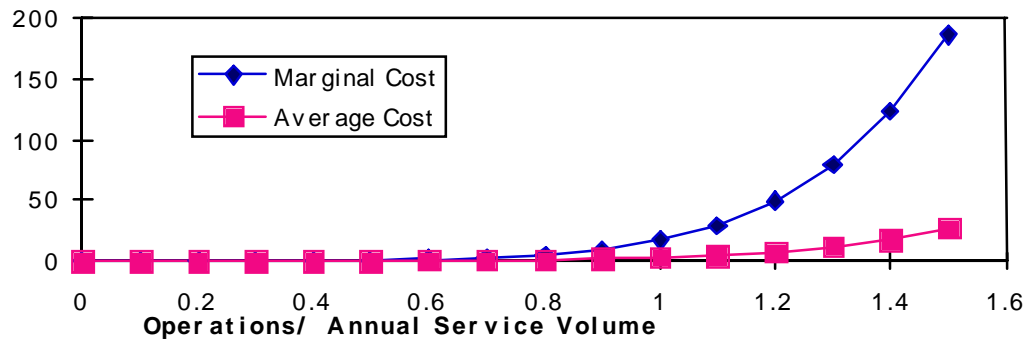

9. END NOTES

There are alternative classification schemes for external costs. Some are described below.

Verhoef (1994) divides external costs for transportation into social, ecological, and intra-sectoral categories, which are caused by vehicles (in-motion or non-in-motion) and infrastructure. To the commonly recognized externalities (noise, congestion, accidents, pollution), he adds the use of space (e.g. parking) and the use of matter and energy (e.g. the production and disposal of vehicles and facilities). Button (1994) classes externalities spatially, considering them to be local (noise, lead, pollution), transboundary (acid rain, oil spills), and global (greenhouse gases, ozone depletion). Gwilliam (1994) combines Verhoef's and Button's schemes, looking at a Global, Local, Quality of Life (Social), and Resource Utilization (air, land, water, space, materials) classification.

Rothengatter (1994) views externalities as occurring at three levels: individual, partial market, total market, and argues that only the total market level is relevant for checking the need of public interventions. He excludes pecuniary effects, activities concerning risk management, activities concerning transaction costs. Externalities are thus public goods whose effects cannot be internalized by private arrangements. Rietveld (1994) identifies temporary effects and non-temporary effects occurring at the demand side and supply side. Maggi (1994) divides the world by mode (road and rail) and medium (air, water, land) and considers noise, accidents, and community and ecosystem severance. Though not mentioned above, to all of this might be added the heat output of transportation, clearly a major factor in the "urban heat island" effect.

Button (1994) develops a model relating ultimate economic causes through physical causes, and symptoms to negative external effects. Neither users nor suppliers take full account of their environmental impacts, leading to excessive use of transport. He argues that policy tools are best aimed at economic causes, though actual measures have targeted all of the stages.

Coase (1992) argues that the problem is that of actions of economic agents have harmful effects on others. His theorem is restated from Stigler (1966) as "... under perfect

competition, private and social costs will be equal.” This analysis extends and controverts the argument of Pigou (1920), who argued that the creator of the externality should pay a tax or be liable. Coase (1992) suggests the problem is lack of property rights, and notes that the externality is caused by both parties, the polluter and the receiver of pollution. In this reciprocal relationship, there would be no noise pollution externality if no-one was around to hear. This theory echoes the Zen question “If a tree falls in the woods and no-one is around to hear, does it make a sound?”. Moreover, the allocation of property rights to either the polluter or pollutee results in a socially optimal level of production, because in theory the individuals or firms could merge and the external cost would become internal. However, this analysis assumes zero transaction costs. If the transaction costs exceed the gains from a rearrangement of activities to maximize production value, then the switch in behavior won’t be made.

There are several means for internalizing these external costs. Pigou identifies the imposition of taxes and transfers, Coase (1992) suggests assigning property rights, while government most frequently uses regulation. To some extent all have been tried in various places and times. In dealing with air pollution, transferable pollution rights have been created for some pollutants. Fuel taxes are used in some countries to deter the amount of travel, with an added rationale being compensation for the air pollution created by cars. The US government establishes pollution and noise standards for vehicles, and requires noise walls be installed along highways in some areas.